


**P&P Optica**

Everything You Need to Know About PPO's Waterfall Elite Configuration

PPO's Smart Imaging System uses hyperspectral imaging to collect and process unparalleled information about food chemistry in real-time. It's a surface inspection technology which means product must be presented in a mono-layer and multiple surfaces need to be inspected. The Waterfall Elite Configuration meets both of these requirements while offering a smaller footprint that fits into space-constrained plants.

Our Smart Imaging System's Waterfall Elite Configuration tumbles product to expose more product surface, with one rejection mechanism and a smaller footprint.

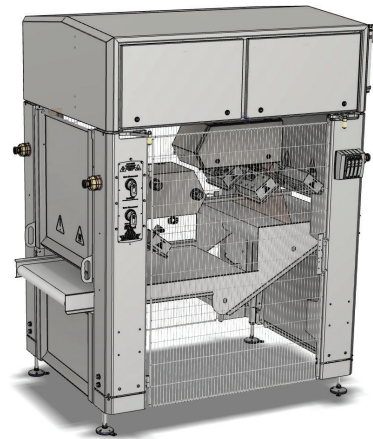

Make a big impact. Enjoy a smaller footprint.

This smaller-footprint configuration is ideal for foreign material detection and lean point measurement on ground or diced poultry, pork trims, coarse grinds of beef or pork trims, and bacon bits.

BUILT FOR THE MEAT PLANT

- Offers adjustable height - raised off the floor for easier inspection and cleaning
- Includes separate HMI enclosure
- Offers adjustable belt guides
- Connects easily to 3rd party sorting devices and 3rd party belting
- Offers the Intralox Series 1100 flat top X-ray detectable white acetyl belt
- Features zero harborage points

SAFE AND COMPLIANT

- Meets all applicable food-safe sanitary design principles and standards including NAMI and CFIA, and is IP69K compliant
- Features fully enclosed imaging & materials handling area with safety interlocks
- Complies with CSA Z43216, IEC EN 61508, ISO 13849-1 and applicable electrical and safety standards including UL, CSA, OSHA, and NFPA 79
- Aligns with accredited licensing body in the U.S. and Canada

**FOOTPRINT**

Length: 58" **Width (doors closed):** 58" **Width (doors open):** 97 (Elite doors open)" **Height:** 93.5"

PPO'S WATERFALL ELITE CONFIGURATION AT-A-GLANCE

As with every PPO Smart Imaging System, the Waterfall Configuration promises high reliability, simple operation and maximum uptime – but in a smaller footprint for plants that need it.

COMPRESSED AIR**Pressure**

80 PSI minimum
145 PSI maximum

Consumption

35 CFM maximum (actual consumption dependent on product quality)

Supply Quality

7:4:4 as per ISO 8573.1
5 micron filtration

ENVIRONMENTAL**Standard Operating Temperature Range:**

0C to +10C /32F to 50F

Non-operating Temperature Range

-25C to +60C/-13F to 140F (Transportation and storage)

Humidity: 90% R.H. maximum, non-condensing

Ingress protection rating IP69K or equivalent

Clean Air Intake Measurements: Intake Air Consumption:
400 CFM MIN Intake Air: 2-8°C

SPEED CAPABILITY

Supports line speeds up to 120 ft/minute and up to 50,000 lbs/hr, depending on the application

BELT WIDTH

Conveyor Belt width (in-feed and out-feed): 30 inches (physical width) Customizable per application

HMI/PLC

10 Inch Touch Screen Panel (IP67, encased touch screen) PLC: Allen Bradley Compact Logix

ELECTRICAL

Power Consumption 3 Phase, 480V, FLA 18.3A, 25A

CONNECTIVITY

Single Gigabit Ethernet port (RJ-45), with appropriate controls to allow access via VPN

The system can be customized to your specific application. Our expert team reviews system design requirements with each client prior to the build.

